



WIRE WOUND CHIP MOLDED INDUCTORS / TP TYPE

ORDERING CODE

EMI suppression generated from round cable used in digital equipment

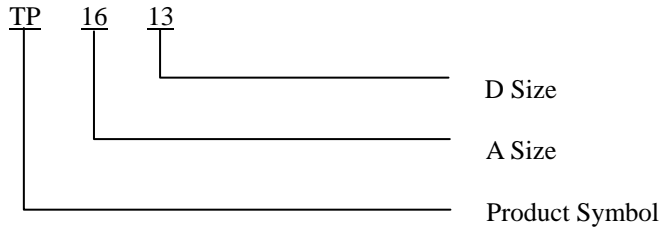

SHAPES

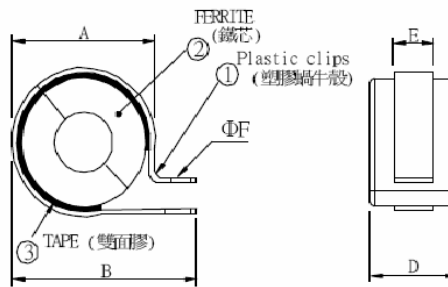

DIMENSIONS & CHARACTERISTICS

| Part No. | ΦA | B | ΦD | ΦF | Impedance | | | |
|----------|------|------|------|-----|-----------|--------|---------|--------|
| | | | | | 1 Turn | | 2 Turns | |
| | | | | | 25MHz | 100MHz | 25MHz | 100MHz |
| TP 16-13 | 19.4 | 30.2 | 13.0 | 4.3 | 45 | 110 | 160 | 370 |
| TP 16-16 | 19.4 | 30.2 | 16.0 | 4.3 | 50 | 150 | 180 | 500 |
| TP 20-10 | 25.7 | 38.2 | 10.0 | 5.1 | 45 | 80 | 140 | 280 |
| TP 23-14 | 26.8 | 39.4 | 14.0 | 5.1 | 40 | 100 | 140 | 350 |
| TP 28-13 | 32.8 | 45.0 | 13.0 | 5.1 | 45 | 105 | 160 | 325 |
| TP 28-20 | 32.8 | 45.0 | 20.0 | 5.1 | 60 | 130 | 250 | 500 |
| TP 40-15 | 44.6 | 59.0 | 15.0 | 5.1 | 40 | 100 | 140 | 350 |



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>