


## SMD WIDE BAND CHOKES / MSH TYPE

### APPLICATIONS


The wide band choke cores are mainly used in the PC boards to filters the EMI from the outsides.



### ORDERING CODE

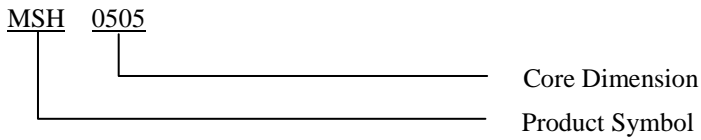

### SHAPES

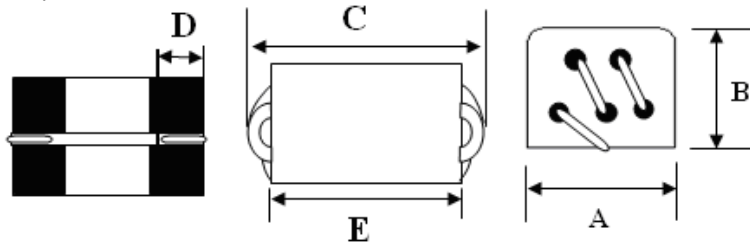

### DIMENSIONS & CHARACTERITICS (UNIT: mm)

Part No.	Impedance ( $\Omega$ ) (MIN)		A	B	C	D	E
	25 MHz	100 MHz					
MSH0505-02	128	280	$5.0 \pm 0.3$	$4.6 \pm 0.3$	8.0 Max	$1.5 \pm 0.5$	$5.5 \pm 0.3$
MSH0510-02	300	500	$5.0 \pm 0.3$	$4.6 \pm 0.3$	11.0 Max	$2.0 \pm 0.5$	$8.4 \pm 0.2$