


## WIDE BAND CHOKE / R6H TYPE

### APPLICATIONS


- ◆ R6H Type Cores are used for Wide Band Choke. The impedance is substantially resistive and constant.
- ◆ Used in PC boards to filter the EMI from the outsides.
- ◆ For radio and TV, small motor ignition device, computer disk driver, communication equipment, and etc.



### ORDERING CODE

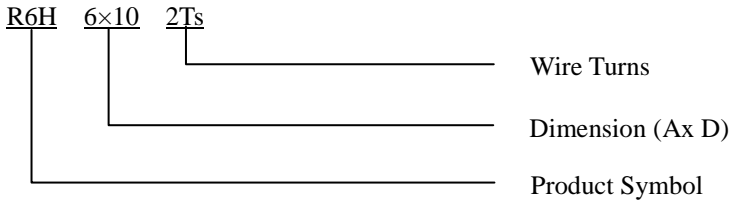

### SHAPES

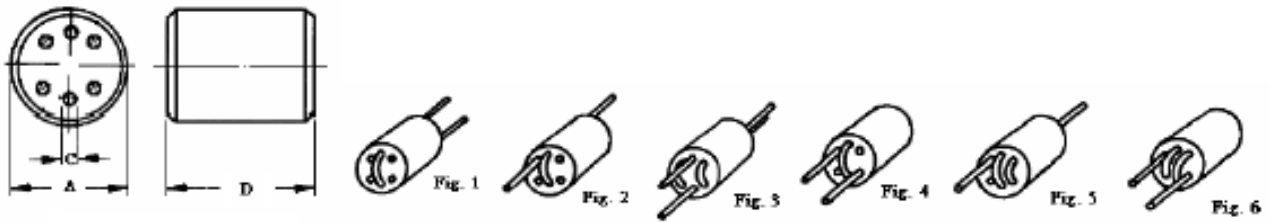

### DIMENSIONS & CHARACTERISTICS (UNIT: mm)

Part No.	Turns	Fig.	Impedance (Ω) (MIN)		A	C	D
			25 MHz	100 MHz			
R6H 6×10	1	1	140	320	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4
R6H 6×10	1.5	2	250	480	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4
R6H 6×10	2 x 1.5	3	300	480	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4
R6H 6×10	2	4	300	600	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4
R6H 6×10	2.5	5	350	640	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4
R6H 6×10	3	6	500	780	6.0 ± 0.25	0.80 ± 0.15	10.0 ± 0.4

**CORE MASTER ENTERPRISE CO., LTD.**



<http://www.coremaster.com.tw>