

EMI BEADS (DIP) / RHWT TYPE

FEATURES


- ◆ Employ high performance ferrites with superior frequency characteristics.

APPLICATIONS


- ◆ Prevent spike noise
- ◆ Prevent intrusion and radiation of unnecessary signals into the clock pulse oscillation section and various interfaces, except those for RGB and composite signals.



ORDERING CODE

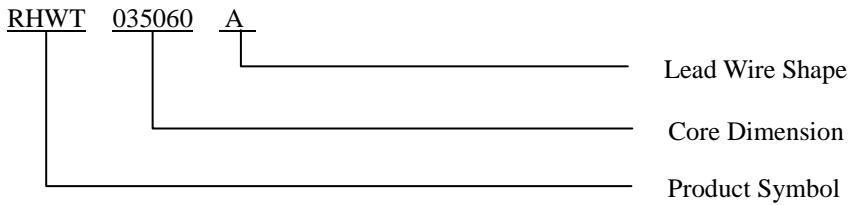

LEAD WIRE SHAPE & TAPING SHAPE (UNIT: mm)

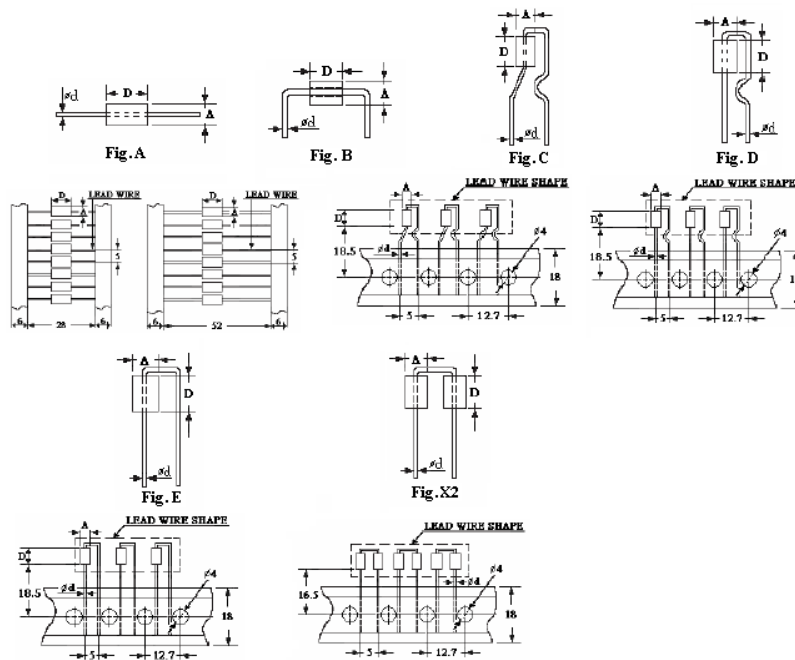

CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

EMI BEADS (DIP) / RHWT TYPE

DIMENSIONS (UNIT: mm)

PartNo.	Shape No.	A	D	Φd (±0.05)	Impedance (Ω) Min		
					25MHz	100MHz	
RHWT 025030	A	2.5 ±0.15	3.0 ±0.30	0.65	12	30	
RHWT 025045		2.5 ±0.15	4.5 ±0.30	0.65	15	40	
RHWT 035050		C	3.5 ±0.20	5.0 ±0.30	0.65	25	50
RHWT 035060			3.5 ±0.20	6.0 ±0.30	0.65	30	60
RHWT 035080		E	3.5 ±0.20	8.0 ±0.30	0.65	35	85
RHWT 035090			3.5 ±0.20	9.0 ±0.40	0.65	40	90
RHWT 035045	B	3.5 ±0.20	4.5 ±0.20	0.65	25	50	
RHWT 035060		3.5 ±0.20	6.0 ±0.30	0.65	30	60	
RHWT 035090		3.5 ±0.20	9.0 ±0.40	0.65	40	90	
RHWT 035045	X2	3.5 ±0.20	4.5 ±0.30	0.65	45	80	
RHWT 035060		3.5 ±0.20	6.0 ±0.30	0.65	50	100	



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>