

MULTILAYER HIGH CURRENT CHIP INDUCTORS / CL(C) TYPE

FEATURES

- ◆ High mounting density of compact circuit due to crosstalk elimination that results from a closed magnetic flux in a ferrite material
- ◆ Suitable for flow and re-flow soldering
- ◆ Available in 5 sizes




APPLICATIONS

- ◆ Personal computers, HDDs, or other various electronic appliances.
- ◆ Any general circuit of portable equipment in which compact size and high mounting densities are required.



ORDERING CODE

CL 2520C 1R0 □- N

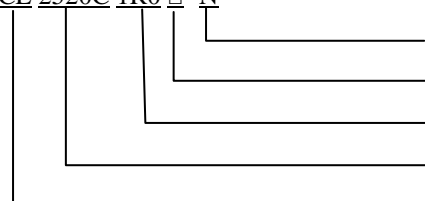

Note: lead-free
Tolerance (K:±10%, M:±20%)
Inductance
Dimension (AxB)
Product Symbol

DIMENSIONS UNIT: mm (inch)



A	2.50 ± 0.2	m/m
B	2.00 ± 0.2	m/m
C	1.00 (Max)	m/m
D	0.80 (Max)	m/m

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>

MULTILAYER HIGH CURRENT CHIP INDUCTORS / CL(C) TYPE

ELECTRICAL CHARACTERISTICS FOR CL2520C

Part No.	Inductance (uH)	Test Freq. (MHz)	Self Resonant FREQ. (MHz) Min	DC Resistance (Ω) Max	Rated Current (mA) Max
CL2520C-R47M-N	0.47	1MHz / 250mV	100	0.088	1800
CL2520C-R68M-N	0.68	1MHz / 250mV	90	0.113	1700
CL2520C-R82M-N	0.82	1MHz / 250mV	80	0.125	1700
CL2520C-1R0M-N	1.00	1MHz / 250mV	60	0.138	1600
CL2520C-1R2M-N	1.20	1MHz / 250mV	60	0.138	1600
CL2520C-1R5M-N	1.50	1MHz / 250mV	50	0.163	1500
CL2520C-1R8M-N	1.80	1MHz / 250mV	50	0.163	1500
CL2520C-2R2M-N	2.20	1MHz / 250mV	40	0.213	1300
CL2520C-3R3M-N	3.30	1MHz / 250mV	30	0.225	1200
CL2520C-4R7M-N	4.70	1MHz / 250mV	25	0.250	1100
CL2520C-6R8M-N	6.80	1MHz / 250mV	25	0.260	1000

CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

