

SHIELDED SMD POWER INDUCTORS / SCI TYPE

FEATURES


- ◆ Low DC resistance
- ◆ Suitable for large currents
- ◆ Available in magnetically shielded
- ◆ Small size with the electrode attached to it




APPLICATIONS

- ◆ Power supply for VTRs.
- ◆ Portable communication equipment.
- ◆ LCD televisions.
- ◆ DC to DC converters, etc.

ORDERING CODE

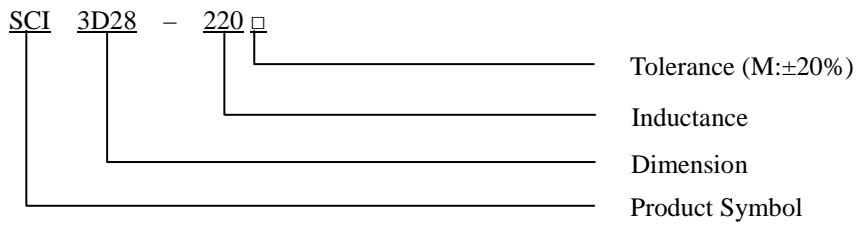

DIMENSIONS (UNIT: mm)

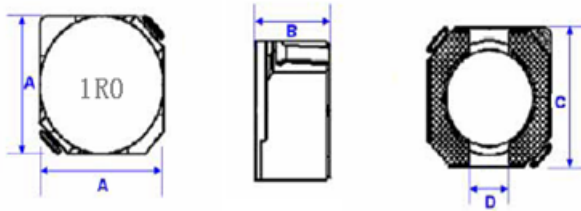

A	4.00 (MAX)	m/m
B	3.00 (MAX)	m/m
C	3.75 (REF)	m/m
D	1.20 (REF)	m/m

SHIELDED SMD POWER INDUCTORS / SCI TYPE

ELECTRICAL CHARACTERISTICS FOR SCI3D28

Part No.	Inductance (μ H)	RDC (Ω)	IDC (A)
SCI3D28-R70 □	0.7	0.030	2.00
SCI3D28-1R0 □	1.0	0.040	2.00
SCI3D28-2R2 □	2.2	0.040	1.00
SCI3D28-3R3 □	3.3	0.050	0.97
SCI3D28-3R9 □	3.9	0.058	0.95
SCI3D28-4R7 □	4.7	0.060	0.90
SCI3D28-5R6 □	5.6	0.070	0.80
SCI3D28-8R2 □	8.2	0.070	0.70
SCI3D28-100 □	10	0.080	0.49
SCI3D28-120 □	12	0.090	0.48
SCI3D28-150 □	15	0.095	0.40
SCI3D28-220 □	22	0.144	0.40
SCI3D28-270 □	27	0.400	0.30
SCI3D28-330 □	33	0.450	0.30
SCI3D28-390 □	39	0.500	0.25
SCI3D28-470 □	47	0.550	0.23
SCI3D28-560 □	56	0.600	0.20
SCI3D28-680 □	68	0.600	0.19
SCI3D28-101 □	100	0.608	0.17
SCI3D28-151 □	150	0.880	0.16
SCI3D28-181 □	180	1.130	0.15
SCI3D28-221 □	220	1.260	0.13

* 100 μ H 以上 Test Frequency : 1KHZ/1V

* 100 μ H 以下 Test Frequency : 100KHZ/0.1V



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>