

FIXED INDUCTORS FOR POWER INDUCTORS / THT TYPE

FEATURES


- ◆ Ultra low buzz noise, due to composite construction.
- ◆ The High current (Isat up to 28A) through hole type.
- ◆ Magnetically shielded, suitable for high density mounting.
- ◆ High energy storage and low DCR.
- ◆ Material: Iron Core / Ni-Zn Core (N)





APPLICATIONS

Excellent for power line DC-DC conversion applications used in power switching, personal computers and other handheld electronic equipment..

ORDERING CODE

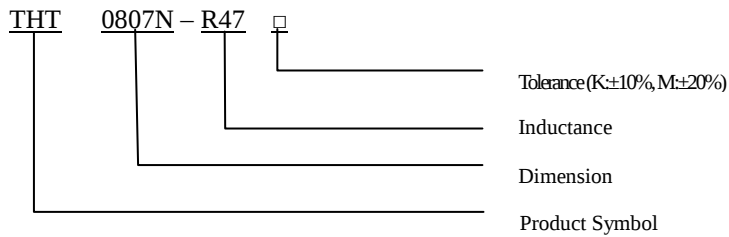

DIMENSIONS (UNIT: mm)



A	9.9 (MAX)	m/m
B	8.2 (MAX)	m/m
C	3.5 ± 0.5	m/m
D	7.5 (MAX)	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

FIXED INDUCOTRS FOR POWER INDUCTORS / THT TYPE

ELECTRICAL CHARACTERISTICS FOR THT0807N

Part No.	Inductance (uH)	RDC (mΩ)	IDC (A) MAX
THT0807N-R47M	0.47	3.20	32
THT0807N-R56M	0.56	3.20	28
THT0807N-R82M	0.80	5.00	23
THT0807N-1R0M	1.00	6.50	18
THT0807N-4R7M	4.70	28.00	5

* Test Frequency : 1KHZ/0.25V



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>