

MULTILAYER CHIP INDUCTORS / CL TYPE

FEATURES

- ◆ High mounting density of compact circuit due to crosstalk elimination that results from a closed magnetic flux in a ferrite material
- ◆ Suitable for flow and re-flow soldering
- ◆ Available in 3 sizes




APPLICATIONS

- ◆ Industrial systems.
- ◆ Power modules.
- ◆ Communication devices.
- ◆ AI systems.
- ◆ Various categories of consumer electronics.


ORDERING CODE

CL 2012- 1R0 □- N

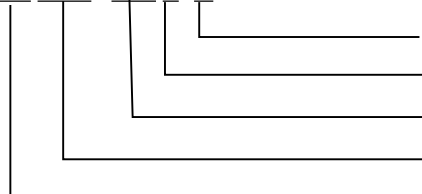

Note: lead-free
Tolerance (K:±10%, M:±20%)
Inductance
Dimension (AxB)
Product Symbol

DIMENSIONS (UNIT: mm)

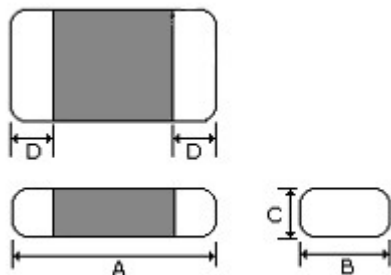

A	2.00 ± 0.2	m/m
B	1.25 ± 0.2	m/m
C	0.85 ± 0.2	m/m
D	0.50 ± 0.3	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

MULTILAYER CHIP INDUCTORS / CL TYPE

ELECTRICAL CHARACTERISTICS FOR CL2012

Part No.	Inductance (uH)	Test Freq. (MHz) 60mV	Q Min	Self Resonant FREQ. (MHz) Min	DC Resistance (Ω) Max	Rated Current (mA) Max
CL 2012-47N □-N	0.047	50	15	320	0.20	300
CL 2012-68N □-N	0.068	50	15	280	0.20	300
CL 2012-82N □-N	0.082	50	15	255	0.20	300
CL 2012-R10 □-N	0.10	25	20	235	0.30	250
CL 2012-R12 □-N	0.12	25	20	220	0.30	250
CL 2012-R15 □-N	0.15	25	20	200	0.40	250
CL 2012-R18 □-N	0.18	25	20	185	0.40	250
CL 2012-R22 □-N	0.22	25	20	170	0.50	250
CL 2012-R27 □-N	0.27	25	20	150	0.50	250
CL 2012-R33 □-N	0.33	25	20	145	0.55	250
CL 2012-R39 □-N	0.39	25	25	135	0.65	200
CL 2012-R47 □-N	0.47	25	25	125	0.65	200
CL 2012-R56 □-N	0.56	25	25	115	0.75	150
CL 2012-R68 □-N	0.68	25	25	105	0.80	150
CL 2012-R82 □-N	0.82	25	25	100	1.00	150
CL 2012-1R0 □-N	1.0	10	45	75	0.40	50
CL 2012-1R2 □-N	1.2	10	45	65	0.50	50
CL 2012-1R5 □-N	1.5	10	45	60	0.50	50
CL 2012-1R8 □-N	1.8	10	45	55	0.60	50
CL 2012-2R2 □-N	2.2	10	45	50	0.65	30
CL 2012-2R7 □-N	2.7	10	45	45	0.75	30
CL 2012-3R3 □-N	3.3	10	45	41	0.80	30
CL 2012-3R9 □-N	3.9	10	45	38	0.90	30
CL 2012-4R7 □-N	4.7	10	45	35	1.00	30
CL 2012-5R6 □-N	5.6	4	45	32	0.90	15
CL 2012-6R8 □-N	6.8	4	45	29	1.00	15
CL 2012-8R2 □-N	8.2	4	45	26	1.10	15
CL 2012-100 □-N	10	2	45	24	1.15	15



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>