



SPECIFICATION FOR APPROVAL

PAD LAYOUT: (UNIT: mm)





ITEM	G (Ref.)	H (Ref.)	I (Ref.)	J (Ref.)
WCM1608	0.20	0.8	0.30	0.9
WCM1210	0.20	0.8	0.50	1.9
WCM2012	0.40	1.4	1.10	2.6
WCM3216	0.60	2.6	1.40	2.8

PACKAGING QUANTITY: (UNIT: mm)

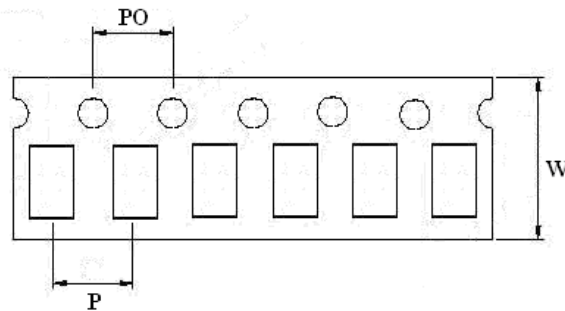

TYPE	P (Ref)	Po(Ref)	W (Ref)	PCS / REEL
WCM1608	4.0	4.0	8.0	1000
WCM1210	4.0	4.0	8.0	4000
WCM2012	4.0	4.0	8.0	3000
WCM3216	4.0	4.0	8.0	3000



TYPE	A (Ref)	B (Ref)	W (Ref)
WCM1608	179	60	9.0
WCM1210	179	60	9.0
WCM2012	179	60	9.0
WCM3216	179	60	9.0




CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SPECIFICATION FOR APPROVAL

RELIABILITY AND TEST CONDITIONS:

Item	Performance	Test Condition															
Operating Temperature	-20~+85℃																
Rated Current	Refer to standard electrical characteristics list.																
Temperature Rise Test	40℃ max. (Δt)																
Solder heat Resistance	Appearance: No significant abnormality. Inductance change: Within ± 30%.	Preheat: 150℃ ,60sec. Solder : H63A Solder temperature:260+0-5℃ Flux: rosin Dip time:10sec. Max. 															
Thermal shock	Appearance: no damage Inductance: within±30%of initial value.	Condition for 1 cycle Step1:-25±2℃ 30±3 min. Step2:Room temperature 15 min. Step3:+105±2℃ 30±3 min. Step4:Room temperature 15 min. Number of cycles:50 <table><tr><th>Phase</th><th>Temperature(℃)</th><th>Time(min)</th></tr><tr><td>1</td><td>-25±2℃</td><td>30±3</td></tr><tr><td>2</td><td>Room Temp.</td><td>15</td></tr><tr><td>3</td><td>+105±2℃</td><td>30±3</td></tr><tr><td>4</td><td>Room Temp.</td><td>15</td></tr></table>	Phase	Temperature(℃)	Time(min)	1	-25±2℃	30±3	2	Room Temp.	15	3	+105±2℃	30±3	4	Room Temp.	15
Phase		Temperature(℃)	Time(min)														
1		-25±2℃	30±3														
2	Room Temp.	15															
3	+105±2℃	30±3															
4	Room Temp.	15															
Humidity Resistance Test	Measured:50 times Temperature:40±2℃. Applied current: rated current. Duration:500 hrs. Humidity:90~95%																
High Temperature Resistance Test		Temperature:105±2℃. Applied current: rated current. Duration:500 hrs.															



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>