

SMD COMMON MODE CHOKE / WCB(B/C/D/E) TYPE


FEATURES

High common mode impedance at noise band and low differential mode impedance at signal band. Due to the low differential mode impedance with high coupling factor, there is almost no distortion on high speed transmission of high resolution video signals.




ORDERING CODE

WCB 2012 D - 900 □ -N

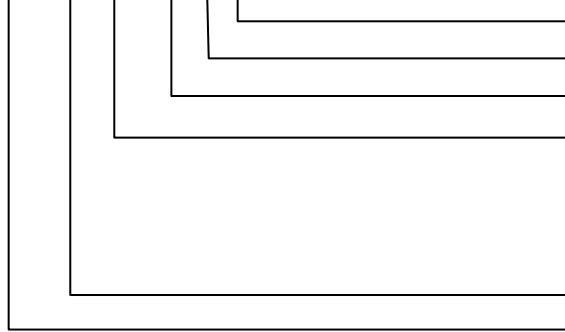

Note: lead-free
 Tolerance (Y:±25%)
 Impedance
 Type:
 B= 3.5GHz
 C= 6GHz
 D= USB3.0
 E= USB3.1
 Dimension
 Product Symbol

SHAPES

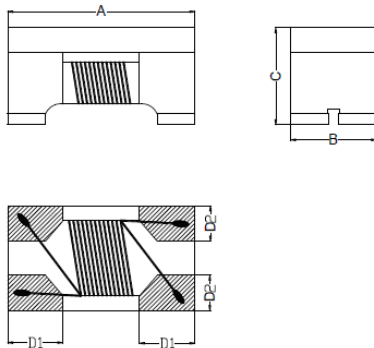

A	2.00 ± 0.2	m/m
B	1.20 ± 0.2	m/m
C	1.20 ± 0.2 or 1.30 ± 0.2	m/m
D1	0.45 (Ref)	m/m
D2	0.40 (Ref)	m/m

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>

SMD COMMON MODE CHOKE / WCB(B/C/D/E) TYPE

ELECTRICAL CHARACTERISTICS FOR WCB 2012B/C/D/E

Part No.	Impedance (Ω)100MHz	DC Resistance (Ω) Max	Rated Current (mA)Max
WCB2012B-900Y-N	90(TYP)	0.30	300
WCB2012C-240Y-N	24(TYP)	0.20	300
WCB2012C-300Y-N	30(TYP)	0.20	300
WCB2012C-600Y-N	60(TYP)	0.30	300
WCB2012C-900Y-N	90(TYP)	0.30	300
WCB2012D-120Y-N	12(TYP)	0.25	420
WCB2012D-240Y-N	24(TYP)	0.25	420
WCB2012D-250Y-N	25(TYP)	0.22	420
WCB2012D-320Y-N	32(TYP)	0.25	400
WCB2012D-600Y-N	60(TYP)	0.30	300
WCB2012D-900Y-N	90(TYP)	0.30	300
WCB2012E-900Y-N	90(TYP)	0.30	300

* Test Frequency : 100MHZ/0.5V

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>