

SMD MULTILAYER FERRITE CHIP BEADS / CB TYPE

FEATURES


- ◆ Suitable for flow and reflow soldering
- ◆ Impedance over a broad frequency range
- ◆ Standard type used to suppress lower-frequency, lower current signals

APPLICATIONS


- ◆ I/O interfaces.
- ◆ Computer motherboards.
- ◆ Various categories of consumer electronics.



ORDERING CODE

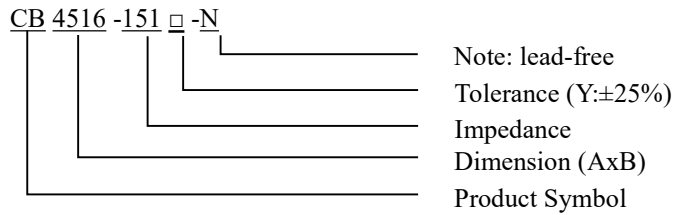

DIMENSIONS (UNIT: mm)

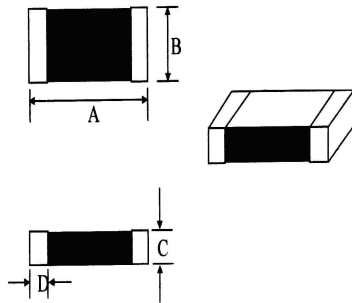

A	4.5 ± 0.2	m/m
B	1.6 ± 0.2	m/m
C	1.6 ± 0.2	m/m
D	0.5 ± 0.3	m/m

ELECTRICAL CHARACTERISTICS CB4516



Part No.	Impedance (Ω) At 100MHz	DCR (Ω) Max	IDC (mA) Max
CB4516-600 □-N	60	0.10	500
CB4516-151 □-N	150	0.30	300



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SMD MULTILAYER FERRITE CHIP BEADS / CB TYPE

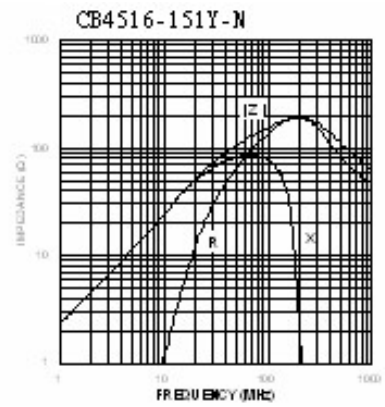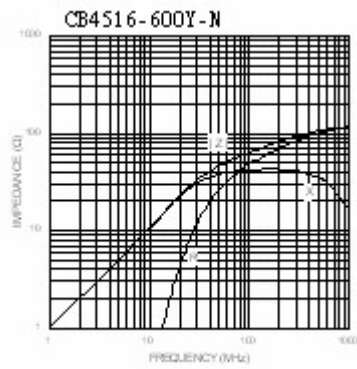

CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>