

SHIELDED SMD POWER INDUCTORS / SCI TYPE

FEATURES

- ◆ Low DC resistance
- ◆ Suitable for large currents
- ◆ Available in magnetically shielded
- ◆ Small size with the electrode attached to it




APPLICATIONS

- ◆ Communication terminals.
- ◆ DC/DC converters, etc.
- ◆ Various categories of consumer electronics.

ORDERING CODE

SCI	2D14	-	100	□	
					Tolerance (M:±20%, N:±30%)
					Inductance
					Dimension
					Product Symbol

DIMENSIONS (UNIT: mm)

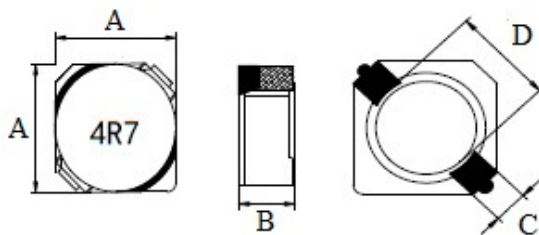

A	3.2 (MAX)	m/m
B	1.6 (MAX)	m/m
C	1.0 (REF)	m/m
D	2.1 (REF)	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SHIELDED SMD POWER INDUCTORS / SCI TYPE

ELECTRICAL CHARACTERISTICS FOR SCI2D14

Part No.	Inductance (uH)	RDC (Ω)	IDC (A)
SCI2D14-1R0 □	1.0	0.080	1.30
SCI2D14-1R5 □	1.5	0.085	1.25
SCI2D14-2R2 □	2.2	0.094	0.80
SCI2D14-3R3 □	3.3	0.145	0.70
SCI2D14-4R7 □	4.7	0.169	0.65
SCI2D14-5R6 □	5.6	0.250	0.60
SCI2D14-6R8 □	6.8	0.260	0.55
SCI2D14-100 □	10	0.550	0.40
SCI2D14-220 □	22	0.900	0.25
SCI2D14-470 □	47	2.300	0.18

* 100uH 以上 Test Frequency : 1KHZ/1V

* 100uH 以下 Test Frequency : 100KHZ/0.1V



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>