

SHIELDED SMD POWER INDUCTORS / SCI TYPE

FEATURES

- ◆ Low DC resistance
- ◆ Suitable for large currents
- ◆ Available in magnetically shielded
- ◆ Small size with the electrode attached to it




APPLICATIONS

- ◆ Communication terminals.
- ◆ DC/DC converters, etc.
- ◆ Various categories of consumer electronics.

ORDERING CODE

SCI	3D14	-	100	□	
					Tolerance (M:±20%, N:±30%)
					Inductance
					Dimension
					Product Symbol

DIMENSIONS (UNIT: mm)

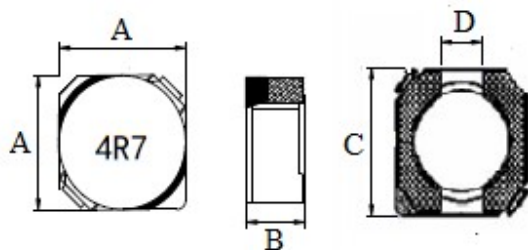

A	4.00 (MAX)	m/m
B	1.80 (MAX)	m/m
C	3.75 (REF)	m/m
D	1.20 (REF)	m/m

ELECTRICAL CHARACTERISTICS FOR SCI3D14

Part No.	Inductance (uH)	RDC (Ω)	IDC (A)
SCI3D14-4R7 □	4.7	0.158	0.70
SCI3D14-100 □	10	0.268	0.48

* 100uH 以上 Test Frequency : 1KHZ/1V

* 100uH 以下 Test Frequency : 100KHZ/0.1V



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>