

SHIELDED SMD POWER INDUCTORS / SRI TYPE

FEATURES


- ◆ Excellent solder ability and high heat resistance for flow soldering.
- ◆ For large current circuits due to its low DC resistance.
- ◆ Excellent in terminal strength due to its high performance ferrite core material and solder ability.




APPLICATIONS

- ◆ Power supply for VTRs.
- ◆ Portable communication equipment.
- ◆ Notebook PCs.
- ◆ LCD televisions.
- ◆ DC/DC converters, etc.

ORDERING CODE

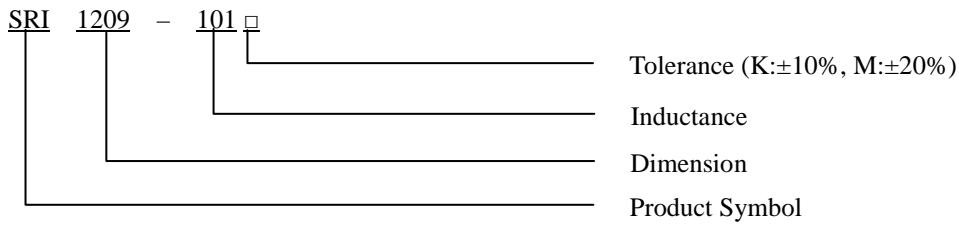

DIMENSIONS (UNIT: mm)

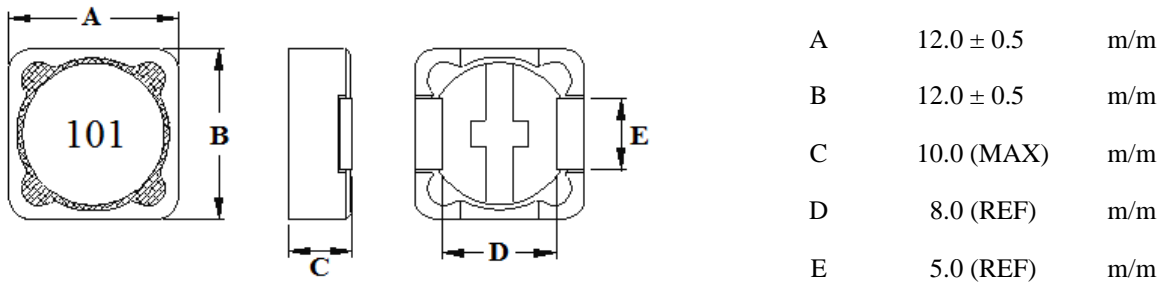

SHIELDED SMD POWER INDUCTORS / SRI TYPE

ELECTRICAL CHARACTERISTICS FOR SRI1209

Part No.	Inductance (uH)	RDC (Ω)	IDC (A)
SRI1209-1R0 □	1.0	0.012	20.00
SRI1209-2R2 □	2.2	0.015	18.00
SRI1209-3R3 □	3.3	0.018	16.00
SRI1209-4R7 □	4.7	0.019	15.00
SRI1209-6R8 □	6.8	0.021	12.80
SRI1209-8R2 □	8.2	0.022	11.10
SRI1209-100 □	10	0.024	10.50
SRI1209-120 □	12	0.026	9.50
SRI1209-150 □	15	0.029	7.00
SRI1209-220 □	22	0.040	6.50
SRI1209-330 □	33	0.055	6.00
SRI1209-470 □	47	0.060	5.00
SRI1209-680 □	68	0.100	3.80
SRI1209-820 □	82	0.120	3.50
SRI1209-101 □	100	0.135	3.00
SRI1209-151 □	150	0.180	2.50
SRI1209-181 □	180	0.250	2.35
SRI1209-221 □	220	0.300	2.20
SRI1209-331 □	330	0.350	1.90
SRI1209-471 □	470	0.490	1.50
SRI1209-681 □	680	0.655	1.30
SRI1209-821 □	820	0.700	1.20
SRI1209-102 □	1000	0.830	1.00

* 100uH 以上 Test Frequency : 1KHZ/1V

* 100uH 以下 Test Frequency : 100KHZ/0.1V

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>