

SHIELDED SMD POWER INDUCTORS / SSR TYPE

FEATURES


- ◆ Magnetically shielded.
- ◆ Low DC resistance.
- ◆ Suitable for large currents.
- ◆ Various high power inductors are superior to be high saturation for surface mounting




APPLICATIONS

- ◆ Power supply for OA equipment.
- ◆ Portable communication equipment.
- ◆ LCD televisions, Notebook.
- ◆ DC to DC converters, etc.

ORDERING CODE

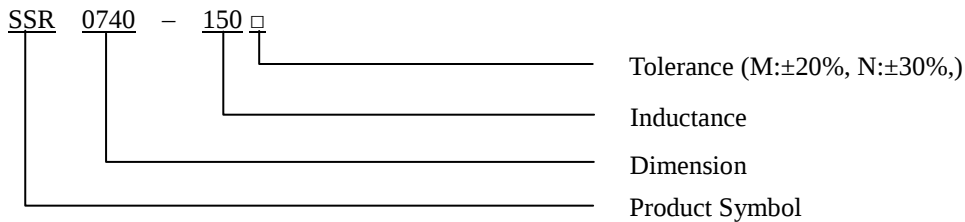

DIMENSIONS (UNIT: mm)

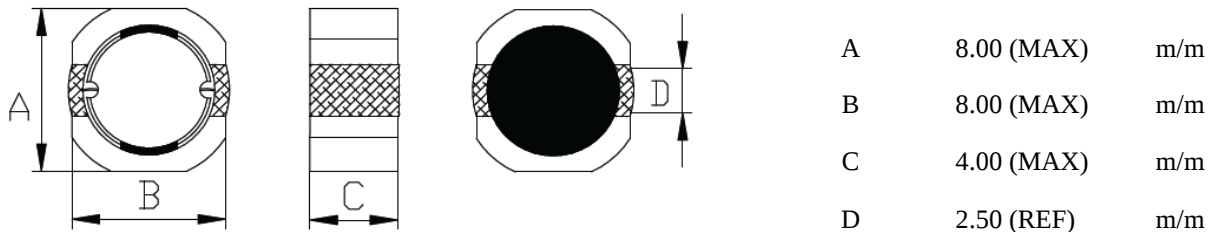

ELECTRICAL CHARACTERISTICS FOR SSR0740

Part No.	Inductance (uH)	Test Frequency	RDC (mΩ)	IDC (A)
SSR0740-1R0 □	1.0	100KHZ	7	7.3
SSR0740-1R5 □	1.5	100KHZ	10	7.2
SSR0740-4R7 □	4.7	100KHZ	24	4.6
SSR0740-150 □	15	100KHZ	62	2.5
SSR0740-220 □	22	100KHZ	76	2.2

CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

