

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SER TYPE

FEATURES


- ◆ Perfect for high current.
- ◆ Extremely low RDC.
- ◆ Low voltage power supply applications.
- ◆ Custom design available.

APPLICATIONS

- ◆ Power systems.
- ◆ DC/DC converters, etc.

ORDERING CODE

SER 2915HT - 3R3 □

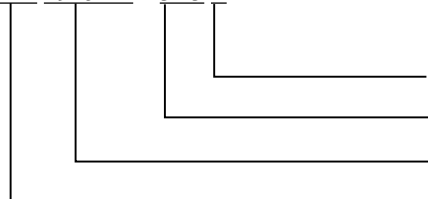

Tolerance (K:±10%, L:±15%, M:±20%)



Inductance

Dimension

Product Symbol



DIMENSIONS UNIT: mm



False pins

A	27.9 (MAX)	m/m
B	19.3 (MAX)	m/m
C	15.5 (MAX)	m/m
D	28.5 (MAX)	m/m
E	3.8 ~ 4.0	m/m
F	6.6 ± 0.5	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SER TYPE

ELECTRICAL CHARACTERISTICS FOR SER2915HT

Part No.	Inductance (uH)	Test Frequency (MHz)	RDC (mΩ) Max	IDC (A) Max
SER2915HT - 3R3□	3.3	500KHz/0.1V	1.75	66.9
SER2915HT - 4R7□	4.7	500KHz/0.1V	1.75	48.0
SER2915HT - 6R8□	6.8	500KHz/0.1V	1.75	34.5
SER2915HT - 100□	10	500KHz/0.1V	1.75	21.5
SER2915HT - 150□	15	500KHz/0.1V	1.75	14.0
SER2915HT - 220□	22	500KHz/0.1V	1.75	8.6
SER2915HT - 330□	33	500KHz/0.1V	1.75	5.1



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>