

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SMG TYPE

FEATURES


- ◆ High saturation current up to 60 A.
- ◆ Lowest core losses (MnZn).
- ◆ Extremely low DCR.
- ◆ Recommended solder profile: Reflow.
- ◆ Magnetically shielded.




APPLICATIONS

- ◆ Multiphase switching regulator.
- ◆ CPU/RAM power supply.
- ◆ Power PC.
- ◆ Filter.

ORDERING CODE

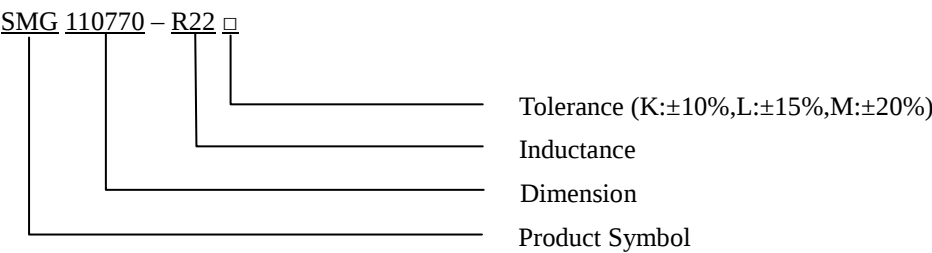

DIMENSIONS UNIT: mm

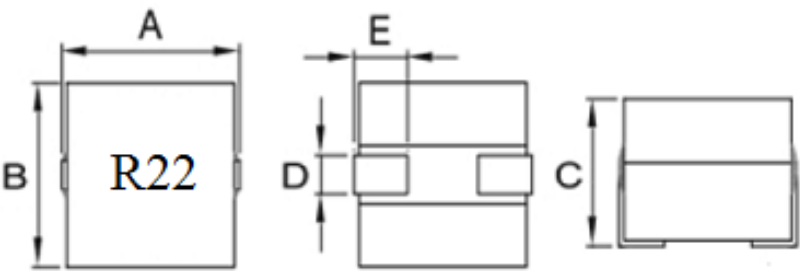

A	11.0 (MAX)	m/m
B	7.50 (MAX)	m/m
C	7.00 (MAX)	m/m
D	1.60 ± 0.2	m/m
E	2.60 ± 0.3	m/m

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SMG TYPE

ELECTRICAL CHARACTERISTICS FOR SMG 110770

Part No.	Inductance (uH)	Test Frequency (KHz)	RDC (mΩ)	IDC (A) Max
SMG 110770-R12□	0.12	100KHz/1.0V	0.37 ± 7%	80
SMG 110770-R18□	0.18	100KHz/1.0V	0.37 ± 7%	50
SMG 110770-R22□	0.22	100KHz/1.0V	0.37 ± 7%	40
SMG 110770-R33□	0.33	100KHz/1.0V	0.37 ± 7%	28
SMG 110770-R40□	0.40	100KHz/1.0V	0.37 ± 7%	21

Notes:

- 1) All test Data is referenced to 25°C ambient
- 2) Operating Temperature Range: -40°C to +125°C