

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SMG TYPE

FEATURES


- ◆ High saturation current up to 60 A.
- ◆ Lowest core losses (MnZn).
- ◆ Extremely low DCR.
- ◆ Recommended solder profile: Reflow.
- ◆ Magnetically shielded.




APPLICATIONS

- ◆ Multiphase switching regulator.
- ◆ CPU/RAM power supply.
- ◆ Power PC.
- ◆ Filter.

ORDERING CODE

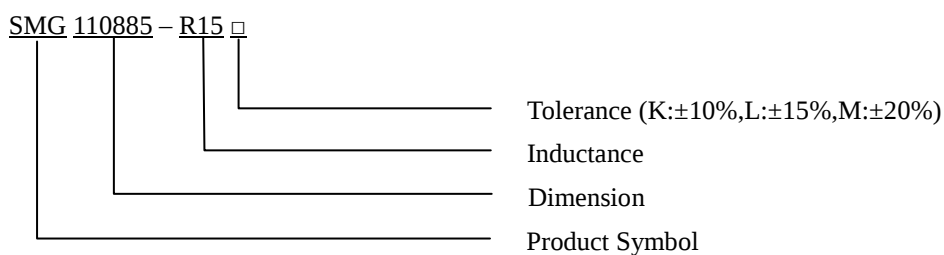

DIMENSIONS UNIT: mm

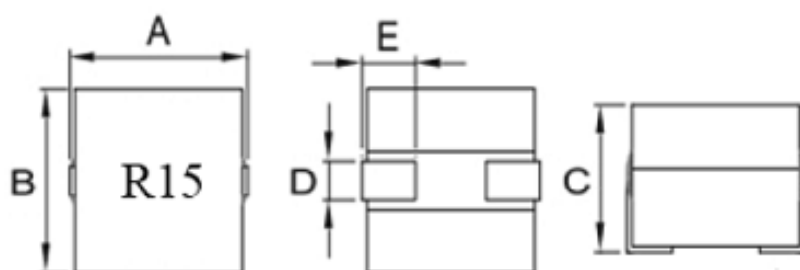

A	11.0 (MAX)	m/m
B	8.00 (MAX)	m/m
C	8.50 (MAX)	m/m
D	1.55 ± 0.2	m/m
E	2.60 ± 0.3	m/m

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SMG TYPE

ELECTRICAL CHARACTERISTICS FOR SMG 110885

Part No.	Inductance (uH)	Test Frequency (KHz)	RDC (mΩ)	IDC (A) Max
SMG 110885-R15□	0.15	100KHz/1.0V	0.50 ± 7%	72
SMG 110885-R18□	0.18	100KHz/1.0V	0.50 ± 7%	60
SMG 110885-R23□	0.23	100KHz/1.0V	0.50 ± 7%	52
SMG 110885-R30□	0.30	100KHz/1.0V	0.50 ± 7%	40
SMG 110885-R45□	0.45	100KHz/1.0V	0.50 ± 7%	20

Notes:

- 1) All test Data is referenced to 25°C ambient
- 2) Operating Temperature Range: -40°C to +125°C