

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS /SMPI-E TYPE

FEATURES


- ◆ Magnetic shielding structure: excellent resistance to electromagnetic interference (EMI).
- ◆ Die-casting by low loss alloy powder: low impedance.
- ◆ High efficiency, wide application frequency and application scope.



APPLICATIONS

- ◆ Industrial Control Motherboards
- ◆ Graphics Cards
- ◆ Tablet PCs / Notebooks
- ◆ Power Distribution
- ◆ DC/DC Converters
- ◆ LED Lighting
- ◆ Communication Equipment
- ◆ Medical Devices

ORDERING CODE

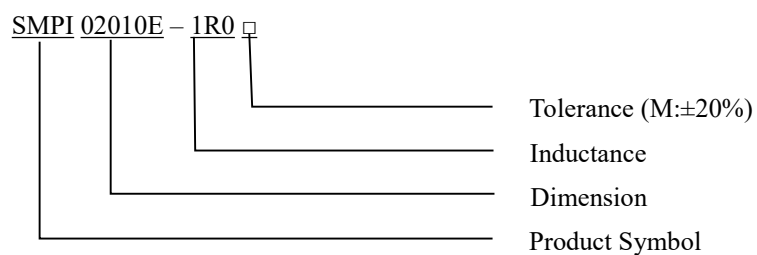

DIMENSIONS UNIT: mm



A	2.0 ± 0.3	m/m
B	1.6 ± 0.3	m/m
C	1.6 (REF)	m/m
D	1.1 (MAX)	m/m
E	0.7 (REF)	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS /SMPI-E TYPE

ELECTRICAL CHARACTERISTICS FOR SMPI 02010E

Part No.	Inductance (uH) @(0A)	Test Frequency	Heat Rating Current Irms(A)	Saturation Current Isat (A) drop30%	RDC (mΩ) MAX
SMPI02010E-R24M	0.24	100KHz/1V	6.3	7.2	20
SMPI02010E-R33M	0.33	100KHz/1V	5.0	7.1	30
SMPI02010E-R47M	0.47	100KHz/1V	4.5	7.0	35
SMPI02010E-R68M	0.68	100KHz/1V	4.0	4.5	52
SMPI02010E-1R0M	1.00	100KHz/1V	3.0	3.5	76
SMPI02010E-1R5M	1.50	100KHz/1V	2.1	3.0	120
SMPI02010E-2R2M	2.20	100KHz/1V	1.6	2.4	204

Notes:

- 1) You require another part number please contact with us.
- 2) Inductance Tolerance $\pm 20\%$; Frequency Test : 100KHz/1.0v
- 3) All test data is referenced to 25°C ambient.
- 4) Irms : DC current (A) that will cause an approximate ΔT of 40°C
- 5) Isat : DC current (A) that will cause Lo to drop approximately 30%
- 6) We can design according to customer's request.



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>