

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS /SMPI-E TYPE

FEATURES


- ◆ Magnetic shielding structure: excellent resistance to electromagnetic interference (EMI).
- ◆ Die-casting by low loss alloy powder: low impedance.
- ◆ High efficiency, wide application frequency and application scope.



APPLICATIONS

- ◆ Industrial Control Motherboards
- ◆ Graphics Cards
- ◆ Tablet PCs / Notebooks
- ◆ Power Distribution
- ◆ DC/DC Converters
- ◆ LED Lighting
- ◆ Communication Equipment
- ◆ Medical Devices

ORDERING CODE

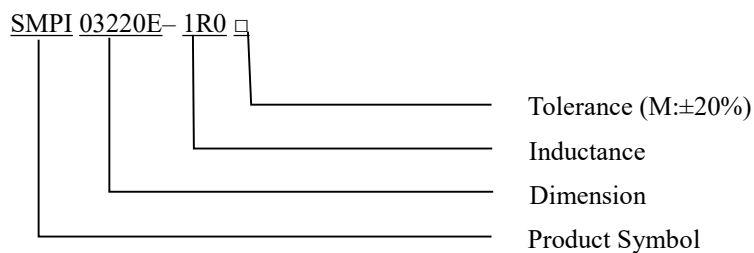

DIMENSIONS UNIT: mm



A	3.2± 0.3	m/m
B	2.5 ± 0.3	m/m
C	2.5 (REF)	m/m
D	2.1 (MAX)	m/m
E	1.0 (REF)	m/m



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS /SMPI-E TYPE

ELECTRICAL CHARACTERISTICS FOR SMPI 03220E

Part No.	Inductance (uH) @0A	Test Frequency	Heat Rating Current Irms(A)	Saturation Current Isat (A) drop30%	RDC (mΩ) MAX
SMPI03220E-R47M	0.47	100KHz/1V	7.0	12.0	13
SMPI03220E-R68M	0.68	100KHz/1V	6.5	11.0	16
SMPI03220E-1R0M	1.00	100KHz/1V	5.4	10.0	22
SMPI03220E-1R5M	1.50	100KHz/1V	4.5	7.5	31
SMPI03220E-2R2M	2.20	100KHz/1V	4.0	7.0	46
SMPI03220E-3R3M	3.30	100KHz/1V	3.0	5.5	65
SMPI03220E-4R7M	4.70	100KHz/1V	2.8	4.5	120
SMPI03220E-6R8M	6.80	100KHz/1V	2.3	4.0	170

Notes:

- 1) You require another part number please contact with us.
- 2) Inductance Tolerance $\pm 20\%$; Frequency Test : 100KHz/1.0v
- 3) All test data is referenced to 25°C ambient.
- 4) Irms : DC current (A) that will cause an approximate ΔT of 40°C
- 5) Isat : DC current (A) that will cause Lo to drop approximately 30%
- 6) We can design according to customer's request.



CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>