

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / SMPI TYPE

FEATURES


- ◆ Performance low resistance , high current rating.
- ◆ Low loss realized with low RDC.
- ◆ Low core loss.

APPLICATIONS


- ◆ PDA / Notebook / Desktop, and server applications.
- ◆ DC/DC converters in distributed power systems.
- ◆ DC/DC converter for Field Programmable Gate Array(FPGA).



ORDERING CODE

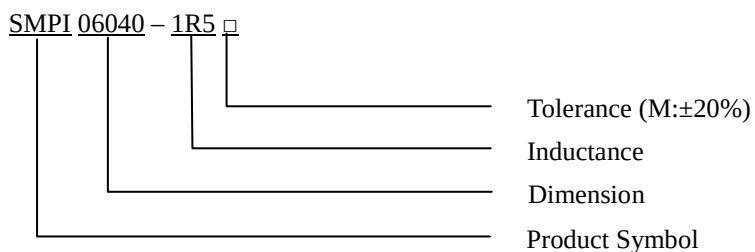

DIMENSIONS UNIT: mm

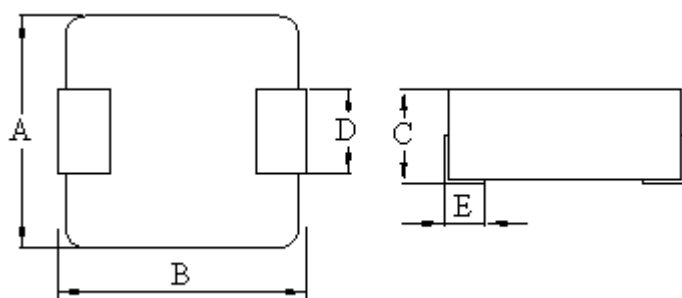

A	6.6 ± 0.3	m/m
B	7.2 ± 0.5	m/m
C	4.0 (MAX)	m/m
D	3.0 ± 0.5	m/m
E	1.6 ± 0.5	m/m

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS /SMPI TYPE

ELECTRICAL CHARACTERISTICS FOR SMPI 06040

Part No.	Inductance (uH)	Test Frequency (KHz)	RDC (mΩ) Max	IDC (A) Max
SMPI06040-R33M	0.33	100KHz/0.1V	2.5	30.0
SMPI06040-R56M	0.56	100KHz/0.1V	4.5	25.0
SMPI06040-1R5M	1.50	100KHz/0.1V	16.0	19.0
SMPI06040-2R2M	2.20	100KHz/0.1V	18.0	16.0
SMPI06040-3R3M	3.30	100KHz/0.1V	25.0	13.0
SMPI06040-4R7M	4.70	100KHz/0.1V	30.0	10.0

Notes:

- 1) All test Data is referenced to 25°C ambient
- 2) Operating Temperature Range: -40°C to +125°C