

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / ST TYPE

FEATURES


- ◆ High current, low loss of iron powder core.
- ◆ Low profile for machine placement.
- ◆ Minimize electromagnetic interference.
- ◆ Suppress common mode noise.
- ◆ Prevent EMI effect via precise impedance.
- ◆ Custom design available.





APPLICATIONS

- ◆ PDA / Notebook / Desktop, and server applications.
- ◆ DC/DC converters in distributed power systems.
- ◆ DC/DC converter for Field Programmable Gate Array(FPGA).

ORDERING CODE

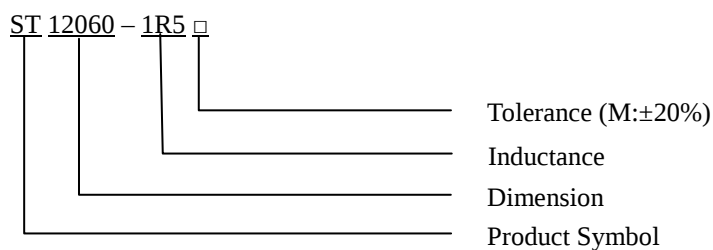

DIMENSIONS (UNIT: mm)

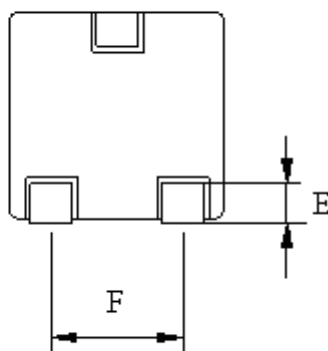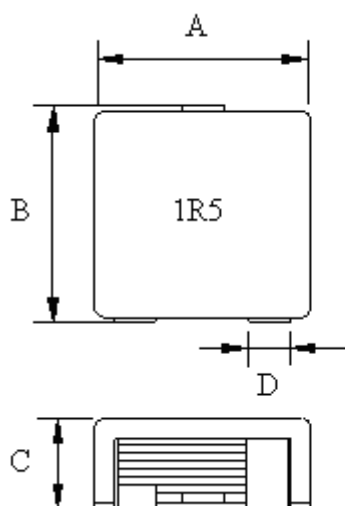

A	12.7 ± 0.4	m/m
B	13.5 ± 0.5	m/m
C	6.0 ± 0.4	m/m
D	2.4 ± 0.3	m/m
E	2.5 ± 0.5	m/m
F	7.8 (REF)	m/m

SURFACE MOUNT HIGH CURRENT POWER INDUCTORS / ST TYPE

ELECTRICAL CHARACTERISTICS FOR ST12060

Part No.	Inductance (uH)	Test Frequency (MHz)	RDC (mΩ) Max	IDC (A) Max
ST12060-1R5M	1.5	100KHz/0.1V	2.5	24
ST12060-2R0M	2.0	100KHz/0.1V	3.5	18
ST12060-2R7M	2.7	100KHz/0.1V	3.5	17
ST12060-3R3M	3.3	100KHz/0.1V	5.0	16
ST12060-4R7M	4.7	100KHz/0.1V	6.0	15