

WIRE WOUND HIGH CURRENT CHIP MOLDED INDUCTORS / WCI (C) TYPE

FEATURES

- ◆ Low RDC, large current type
- ◆ Best for power supply line.
- ◆ Available in 2 sizes.




APPLICATIONS

- ◆ Portable Telephones
- ◆ Personal computers
- ◆ HDDs.
- ◆ Other electronics appliances.


ORDERING CODE

WCI 3225C - 220 □ - N

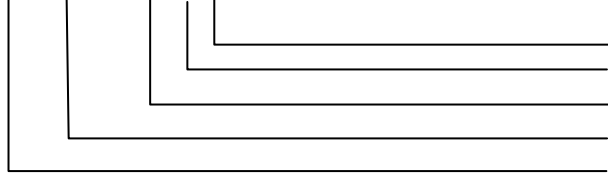

Note: lead-free
Tolerance (J:±5%, K:±10%)
Inductance
Dimension
Product Symbol

DIMENSIONS (UNIT: mm)

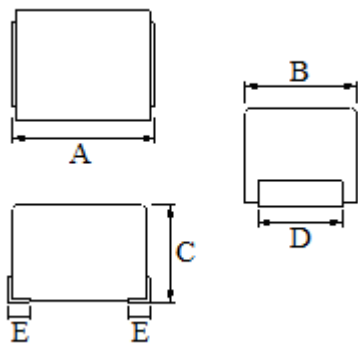

A	3.2 ± 0.3	m/m
B	2.5 ± 0.2	m/m
C	2.2 ± 0.2	m/m
D	1.9 (REF)	m/m
E	0.3 (REF)	m/m

CORE MASTER ENTERPRISE CO., LTD.

<http://www.coremaster.com.tw>



WIRE WOUND HIGH CURRENT CHIP MOLDED INDUCTORS / WCI (C) TYPE

ELECTRICAL CHARACTERISTICS FOR WCI 3225C

Part No.	Inductance (uH)	Test Freq. (MHz)	Q Min	Self Resonant FREQ. (MHz) Min	DC Resistance (Ω) Max	Rated Current (mA) Max
WCI 3225C-R15 □-N	0.15	25.2	5	400	0.25	1350
WCI 3225C-R22 □-N	0.22	25.2	5	250	0.30	1150
WCI 3225C-R47 □-N	0.47	25.2	5	150	0.30	1000
WCI 3225C-1R0 □-N	1.0	7.96	10	100	0.30	850
WCI 3225C-1R5 □-N	1.5	7.96	10	80	0.30	700
WCI 3225C-2R2 □-N	2.2	7.96	10	68	0.30	600
WCI 3225C-3R3 □-N	3.3	7.96	10	54	0.35	500
WCI 3225C-4R7 □-N	4.7	7.96	15	46	0.45	430
WCI 3225C-6R8 □-N	6.8	7.96	15	38	0.50	360
WCI 3225C-100 □-N	10	2.52	15	30	0.80	300
WCI 3225C-150 □-N	15	2.52	15	26	1.60	250
WCI 3225C-220 □-N	22	2.52	15	21	2.20	210
WCI 3225C-330 □-N	33	2.52	15	17	2.80	170
WCI 3225C-470 □-N	47	2.52	15	14	3.20	150
WCI 3225C-560 □-N	56	2.52	15	13	5.00	120
WCI 3225C-680 □-N	68	2.52	15	12	5.00	120
WCI 3225C-820 □-N	82	2.52	15	10	6.50	110
WCI 3225C-101 □-N	100	0.796	15	10	7.50	100
WCI 3225C-151 □-N	150	0.796	20	7	11	85
WCI 3225C-221 □-N	220	0.796	20	6	14	70
WCI 3225C-331 □-N	330	0.796	20	5	21	60

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>