

COMMON MODE CHOKE COILS / LFV TYPE

FEATURES


- ◆ Wide inductance range
- ◆ Easy PC Board Mounting
- ◆ High levels of safety and reliability
- ◆ Available as vertically or horizontally mounted




APPLICATIONS

- ◆ TV, VCR
- ◆ NC machines
- ◆ Peripheral units
- ◆ Computer systems
- ◆ Measuring instruments
- ◆ Switching power sources

ORDERING CODE

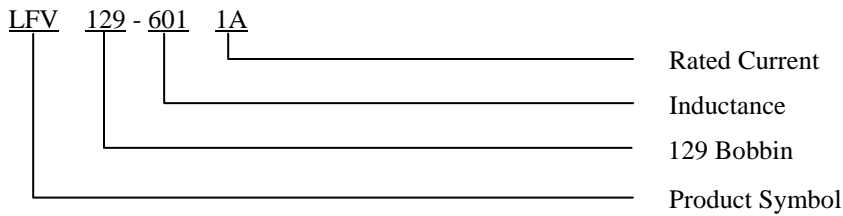

SHAPES & DIMENSIONS (UNIT: mm)

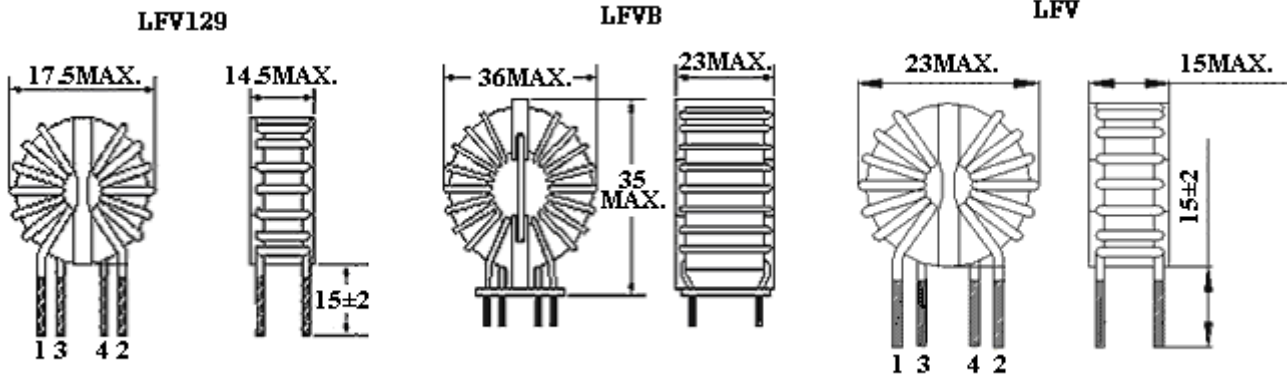

ELECTRICAL CHARACTERISTICS

Part No.	Inductance (mH)	DC Resistance (mΩ)	Rated Current (A)
LFV129	0.6 - 5.0	60 - 150	1 - 3
LFVB	0.2 - 1.5	5 - 45	3 - 15
LFV	1.0 - 10	80 - 260	1 - 2

*DESIGN AS CUSTOMER'S REQUESTED SPECIFICATIONS

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>