


SMD EMI BEADS / MSH TYPE

APPLICATIONS


The wide band choke cores are mainly used in the PC boards to filters the EMI from the outsides.



ORDERING CODE

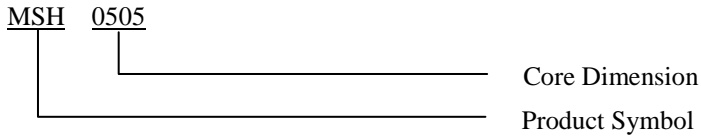

SHAPES

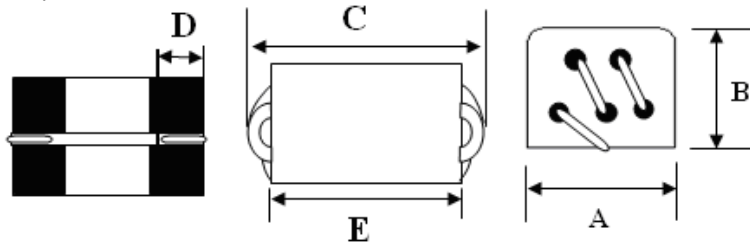

DIMENSIONS & CHARACTERITICS (UNIT: mm)

Part No.	Impedance (Ω) (MIN)		A (± 0.3)	B (± 0.3)	C (Max)	D (± 0.5)	E
	25 MHz	100 MHz					
MSH0505-02	128	280	5.0	4.6	8.0	1.5	5.5 \pm 0.3
MSH0510-02	300	600	5.0	4.6	11.0	2.0	8.4 \pm 0.2

CORE MASTER ENTERPRISE CO., LTD.



<http://www.coremaster.com.tw>